


Specification sheet

CF 410

FAS 6X2 Rigid, n-EC, double mounted trailing axle

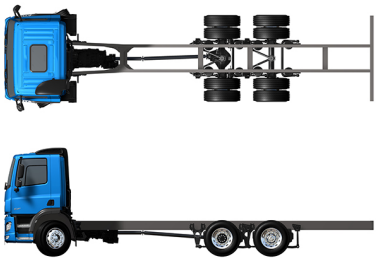

ENGINES
CF 370 MX-11 (270 kW / 367 hp)
CF 410 MX-11 (300 kW / 408 hp)
CF 450 MX-11 (330 kW / 449 hp)
CF 430 MX-13 (315 kW / 428 hp)
CF 480 MX-13 (355 kW / 483 hp)
CF 530 MX-13 (390 kW / 530 hp)

GVM ¹⁾	GCM ²⁾
27000 kg	44000 kg
Max. front 8000 kg	
Max. rear 19800 kg	

DAF Trucks N.V., The Netherlands, www.daf.com

991F8729ABAA - 201949c - 29-08-2019

CAB EXTERIOR

Day Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; LED daytime running lights; Manually adjustable main mirrors; No front view mirror.

Optional

02106 Sleeper Cab	09983 Fog lights
01137 Space Cab	09984 Fog lights and cornering lights
01226 Cab suspension air	06593 Skylights
01174 External sun visor green translucent	06628 One hazard beacon light at co-driver side
00847 Air horns, single set	06627 One hazard beacon light at driver side
09006 Air horns, double set	06629 Two hazard beacon lights
08020 LED head lights	

AERODYNAMICS

Optional

06776 Adjustable roof air deflector	04906 Side collars
--	---------------------------

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey..

Optional

06485 Head lamp panel and bumper: cab colour	09933 Head lamp panel and bumper: Stone Grey
---	---

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Black Rock; Driver seat: Comfort Air; Co-driver seat: basic; Automatic Temperature Control and airco; Roof hatch glass, manual control; Pollen filter.

Optional

09271 Steering wheel, leather, colour black	07746 Co-driver seat: Super Air
07240 Steering wheel, leather, Exclusive	07748 Co-driver seat: Xtra Leather Air
07152 Cab interior trim colour Exclusive	00967 Seat belts red
07592 Cab interior decoration Argenta	02117 Third seat
07591 Cab interior decoration Rustica	06539 Refrigerator
07733 Driver seat: Luxury Air	06783 Lower bunk foam mattress
07736 Driver seat: Super Air	06784 Lower bunk mattress Xtra Comfort
07737 Driver seat: Xtra Leather Air	06676 PL light in cab ceiling
07741 Co-driver seat: Comfort Air	06970 Automatic Cab Climate Control
07743 Co-driver seat: Luxury Air	

COMMUNICATION AND DRIVING MANAGEMENT

Tachograph mechanical; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: AM/FM, 2x GSM, GPS; Cruise control.

Optional

09681 Preparation for Maut	07261 TruckPhone
08450 Luxury speaker system with 6 speakers	08891 Adaptive Cruise Control with FCW and AEBS
07117 Radio/USB player, 2 speakers	06991 Predictive Cruise Control
01100 Truck Navigation Radio, 6 speakers	06992 Predictive Cruise Control lite

SAFETY AND SECURITY

No Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	09827 Side camera system
09828 Front camera system	01725 Reverse warning

SUSPENSION AND AXLES

Rear: 12.00 + 7.80 t, air suspension, SR1347.

Optional

06257 Front axle load 9.00 t	01800 Rear axle SR1344
04647 Front springs air	00567 Rear axle load 10.00+10.00 t
04057 Rear axle HR1356	08191 Axle load monitoring

WHEELS AND TYRES

Front axle 1: 315/70R22.5; Rear axle 1: 315/70R22.5; Rear axle 2: 315/70R22.5; Disc wheels steel, silvergrey; No wheel protection rings.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 300 kW (408 hp) at 1600 rpm. Maximum torque 2100 Nm at 900-1125 rpm.; Exhaust emission Euro 5; Engine idle shutdown, 5 minutes; Manual gearbox, 16 speeds; Gearbox ratio 13.80-0.84; Rear axle ratio 2.80.

Optional

03600 Exhaust emission Euro 6	07103 Automated gearbox, TraXon, 16 speeds
07102 Automated gearbox, TraXon, 12 speeds	

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode..

Optional

09921 MX Engine Brake	04901 Spring brake cylinders on the first front axle
02715 ZF Intarder	

CHASSIS

Wheelbase 3.80 m / rear overhang 2.05 m; Side member height 310 mm; Standard component location; Exhaust pipe horizontal, low; Steel fuel tank 300 l, height 580 mm; Spray suppression; Front underrun protection (FUP); AdBlue tank 45 litres, left-hand side chassis.

Optional

02393 Side member height 260 mm	07071 Spare wheel carrier right-hand side
06611 Exhaust pipe vertical, high	03323 Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

D-value cross member D=13.7; Pneumatic trailer connection palm type; Electric connection 24 V / 2x7 pins.

Optional

- | | |
|--|--|
| 07033 Trailer coupling Ringfeder D=13.7 | 08027 Trailer coupling Rockinger D=20.0 |
| 07034 Trailer coupling Ringfeder D=20.0 | 04624 Closing member |
| 08026 Trailer coupling Rockinger D=13.0 | 07032 D-value cross member D=20 |

BODIES AND PREPARATIONS FOR BODYING

Application connector on the cab front.

Optional

- | | |
|---|--|
| 04331 Appl connector including air control prep | 06692 Application connector on the chassis |
| 09050 Application connectors for bb remote control | 02597 Application connector for tail lift control |

POWER TAKE-OFF (PTO)

Optional

- 16148** PTO types and positions

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 175 Ah..

Optional

- | | |
|-------------------------------|--------------------------------|
| 06460 Alternator 120 A | 01257 Batteries 2x140Ah |
| 08775 Alternator 150 A | 06440 Batteries 2x230Ah |

GVM AND GCM

Chassis weight related technical GVM max 27000 kg; Driveline related max GCM 44000 kg class 2.

Optional

- | | |
|---|---|
| 00200 Driveline related max GCM 38000 kg class 2 | 00939 Driveline related max GCM 56000 kg class 2 |
|---|---|

APPLICATION CONDITIONS

Cyclonic air intake behind the cab.

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle, 2nd year driveline and 1st year breakdown.; ITS service.

Optional

- 08310** Service interval standard





Go to **DAF.com** to configure your own perfect DAF.

CF 410

FAS 6X2 Rigid,

n-EC, double mounted trailing axle

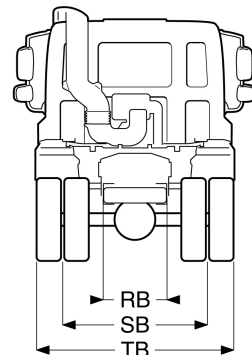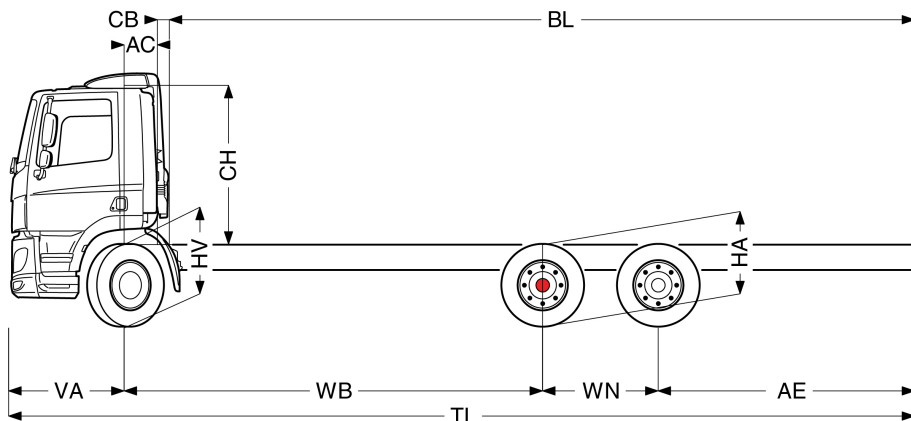

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ²⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
DAY CAB	3.80	2.05	4466	3558	8025	3534	16242	18975	0.39	0.18	1.94	5.94	6.31	8.62	1.02	0.99	14.93	16.31
	4.20	2.40	4454	3637	8091	3546	16163	18909	0.39	0.18	1.94	6.58	6.98	9.37	1.02	0.99	15.97	17.36
	4.40	2.55	4470	3702	8172	3530	16098	18828	0.39	0.18	1.94	6.91	7.33	9.72	1.02	0.99	16.49	17.89
	4.60	2.75	4473	3750	8223	3527	16050	18777	0.39	0.18	1.94	7.23	7.67	10.12	1.02	0.99	17.01	18.42
	4.80	2.90	4475	3784	8259	3525	16016	18741	0.39	0.18	1.94	7.55	8.01	10.47	1.02	0.99	17.53	18.95
	5.05	2.90	4488	3795	8283	3512	16005	18717	0.39	0.18	1.94	7.96	8.44	10.72	1.02	0.99	18.19	19.61
	5.30	2.90	4502	3806	8308	3498	15994	18692	0.39	0.18	1.94	8.37	8.87	10.97	1.02	0.99	18.84	20.27
	5.60	2.85	4532	3832	8364	3468	15968	18636	0.39	0.18	1.94	8.87	9.40	11.22	1.02	0.99	19.63	21.06
SLEEPER CAB	5.90	2.80	4552	3838	8389	3448	15962	18611	0.39	0.18	1.94	9.37	9.93	11.47	1.02	1.00	20.41	21.85
	3.80	2.05	4466	3558	8025	3534	16242	18975	0.39	0.18	1.94	5.94	6.31	8.62	1.02	0.99	14.93	16.31
	4.20	2.40	4514	3644	8158	3486	16156	18842	0.82	0.16	1.94	5.79	6.19	9.37	1.02	0.99	15.97	17.36
	4.40	2.55	4530	3708	8239	3470	16092	18761	0.82	0.16	1.94	6.11	6.53	9.72	1.02	0.99	16.49	17.89
	4.60	2.75	4533	3756	8289	3467	16044	18711	0.82	0.16	1.94	6.44	6.87	10.12	1.02	0.99	17.01	18.42
	4.80	2.90	4535	3790	8325	3465	16010	18675	0.82	0.16	1.94	6.76	7.22	10.47	1.02	0.99	17.53	18.95
	5.05	2.90	4549	3800	8349	3451	16000	18651	0.82	0.16	1.94	7.17	7.65	10.72	1.02	0.99	18.19	19.61
	5.30	2.90	4563	3811	8374	3437	15989	18626	0.82	0.16	1.94	7.58	8.09	10.97	1.02	0.99	18.84	20.27
SPACE CAB	5.60	2.85	4593	3837	8430	3407	15963	18570	0.82	0.16	1.94	8.09	8.62	11.22	1.02	0.99	19.63	21.06
	5.90	2.80	4613	3842	8455	3387	15958	18545	0.82	0.16	1.94	8.59	9.14	11.47	1.02	0.99	20.41	21.85
	3.80	2.05	4466	3558	8025	3534	16242	18975	0.39	0.18	1.94	5.94	6.31	8.62	1.02	0.99	14.93	16.31
	4.20	2.40	4626	3643	8269	3374	16157	18731	0.82	0.16	2.62	5.83	6.24	9.37	1.02	0.99	15.97	17.36
	4.40	2.55	4642	3707	8350	3358	16093	18650	0.82	0.16	2.62	6.16	6.59	9.72	1.02	0.99	16.49	17.89
	4.60	2.75	4646	3755	8400	3354	16045	18600	0.82	0.16	2.62	6.49	6.93	10.12	1.02	0.99	17.01	18.42
	4.80	2.90	4647	3789	8436	3353	16011	18564	0.82	0.16	2.62	6.81	7.27	10.47	1.02	0.99	17.53	18.95
	5.05	2.90	4661	3799	8460	3339	16001	18540	0.82	0.16	2.62	7.23	7.71	10.72	1.02	0.99	18.19	19.61
	5.30	2.90	4675	3810	8485	3325	15990	18515	0.82	0.16	2.62	7.64	8.15	10.97	1.02	0.99	18.84	20.27
	5.60	2.85	4705	3836	8541	3295	15964	18459	0.82	0.16	2.62	8.15	8.68	11.22	1.02	0.99	19.63	21.06
	5.90	2.80	4725	3841	8566	3275	15959	18434	0.82	0.16	2.62	8.65	9.21	11.47	1.02	0.99	20.41	21.85

OTHER DIMENSIONS VA: 1.37 WN: 1.40 HV¹³⁾: 1.03 HV¹⁴⁾: 0.98 RB: 0.79 SB: 1.82 TB¹⁵⁾: 2.48

- GVM in conformity with registration documents.
- GCM in conformity with registration documents.
- Axle load with standard tyre size.
- Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue and driver of 0 kg, tolerance $\pm 3\%$. Changing of the specification can have major impact on vehicle weight.
- Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.
- CB is based on standard air intake and/or exhaust.
- Cab height is measured from frame member to closed cab roof hatch. With air intake on cab roof add: 0.14 m (for MX-11); add 0.21 m for MX-13.

- Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.
- Unladen height at centre of driven axle (trailing axle down).
- Laden height at centre of driven axle(s).
- TK = turning circle between kerbs.
- TW = turning circle between walls.
- Unladen height at centre of front axle(s).
- Laden height at centre of front axle(s).
- TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.