


Specification sheet

CF 410

FT 4X2 Tractor,

n-EC



ENGINES

CF 370 MX-11 (270 kW / 367 hp)
CF 410 MX-11 (300 kW / 408 hp)
CF 450 MX-11 (330 kW / 449 hp)
CF 430 MX-13 (315 kW / 428 hp)
CF 480 MX-13 (355 kW / 483 hp)
CF 530 MX-13 (390 kW / 530 hp)

GVM¹⁾

20500 kg
Max. front 8000 kg
Max. rear 13000 kg

GCM²⁾

44000 kg

CAB EXTERIOR

Sleeper Cab with galvanised steel bumper, tinted glass and electric window openers. Main mirrors and wide angle mirrors electrically heated. Cab width 2300 mm.; LED daytime running lights; Manually adjustable main mirrors; No front view mirror.

Optional

01899 Day Cab	09983 Fog lights
01137 Space Cab	09984 Fog lights and cornering lights
01226 Cab suspension air	06593 Skylights
01174 External sun visor green translucent	06628 One hazard beacon light at co-driver side
00847 Air horns, single set	06627 One hazard beacon light at driver side
09006 Air horns, double set	06629 Two hazard beacon lights
08020 LED head lights	

AERODYNAMICS

Optional

07840 Adj. roof air deflector, wide, for Sleeper Cab	04906 Side collars
07841 Adj. roof air deflector, wide, for Space Cab	04146 Side skirts
06776 Adjustable roof air deflector	

COLOURS

Cab colour H3279 Brilliant White; Head lamp panel and bumper: Brilliant White; Chassis colour grey..

Optional

06485 Head lamp panel and bumper: cab colour	09933 Head lamp panel and bumper: Stone Grey
---	---

CAB INTERIOR

Cab interior trim colour Dark Sand; Cab interior decoration Black Rock; Driver seat: Comfort Air; Co-driver seat: basic; Lower bunk, normal level; Automatic Temperature Control and airco; No auxiliary cab heater; Roof hatch aluminium, manual control; Pollen filter.

Optional

09271 Steering wheel, leather, colour black	07748 Co-driver seat: Xtra Leather Air
07240 Steering wheel, leather, Exclusive	00967 Seat belts red
07152 Cab interior trim colour Exclusive	02117 Third seat
07592 Cab interior decoration Argenta	06539 Refrigerator
07591 Cab interior decoration Rustica	31364 Without feature: Lower bunk mattress
07733 Driver seat: Luxury Air	06784 Lower bunk mattress Xtra Comfort
07736 Driver seat: Super Air	31365 Without feature: Upper bunk
07737 Driver seat: Xtra Leather Air	01066 Upper bunk
07741 Co-driver seat: Comfort Air	06676 PL light in cab ceiling
07743 Co-driver seat: Luxury Air	06970 Automatic Cab Climate Control
07746 Co-driver seat: Super Air	

COMMUNICATION AND DRIVING MANAGEMENT

Tachograph mechanical; Speed limiter setting 85 km/h; Eco off 90 km/h; Antennas: AM/FM, 2x GSM, GPS; Cruise control.

Optional

09681 Preparation for Maut	07261 TruckPhone
08450 Luxury speaker system with 6 speakers	08891 Adaptive Cruise Control with FCW and AEBS
07117 Radio/USB player, 2 speakers	06991 Predictive Cruise Control
01100 Truck Navigation Radio, 6 speakers	06992 Predictive Cruise Control lite

SAFETY AND SECURITY

No Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	09827 Side camera system
09828 Front camera system	01725 Reverse warning

SUSPENSION AND AXLES

Rear: 13.00 t, air suspension, SR1347.

Optional

01769 Front axle load 7.50 t	01800 Rear axle SR1344
06257 Front axle load 9.00 t	01603 Rear springs parabolic
04647 Front springs air	08191 Axle load monitoring
04057 Rear axle HR1356	

WHEELS AND TYRES

Front axle 1: 315/70R22.5; Rear axle 1: 315/70R22.5; Disc wheels steel, silvergrey; No wheel protection rings.

Optional

16152 Tyre makes and types

DRIVELINE

Engine MX-11, multi torque 6 cylinder diesel engine, 10.8 litres. Output 300 kW (408 hp) at 1600 rpm. Maximum torque 2100 Nm at 900-1125 rpm.; Exhaust emission Euro 5; Engine idle shutdown, 5 minutes; Manual gearbox, 16 speeds; Gearbox ratio 13.80-0.84; Rear axle ratio 2.80; ASR.

Optional

03600 Exhaust emission Euro 6	07103 Automated gearbox, TraXon, 16 speeds
07102 Automated gearbox, TraXon, 12 speeds	

BRAKE SYSTEM

Exhaust brake; Park brake control with test position; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS). Twin cylinder air compressor with heated dryer and economy mode..

Optional

09921 MX Engine Brake	04901 Spring brake cylinders on the first front axle
02715 ZF Intarder	

CHASSIS

Wheelbase 3.80 m / rear overhang 0.75 m; Side member height 260 mm; Standard component location; Exhaust pipe horizontal, low; Aluminium fuel tank 430 l, height 620 mm; Rear mudguards; Worklamp white; Spray suppression; Front underrun protection (FUP); Catwalk with step; AdBlue tank 45 litres on left-hand mudguard.

Optional

08916 Component-free right hand side, 1600 mm	07070 Spare wheel carrier left-hand side
08917 Component-free right hand side, 1800 mm	07071 Spare wheel carrier right-hand side
06611 Exhaust pipe vertical, high	03624 One wheel chock
08641 Air tanks aluminium	06306 Two wheel chocks
07053 Worklamp LED	03323 Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

Fifth wheel Jost type JSK42C, cast iron, height 150 mm with 40 mm mounting plate. King pin diameter 2 inches, D-value 152 kN, maximum vertical load 20 tonnes.; Fifth wheel KA dimension 670 mm; Pneumatic trailer connection palm type; Electric connection 24 V / 2x7 pins.

Optional

03178 Towing hook D= 4.3	06731 Chassis protection beam
04359 Lead-up ramps	

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

ELECTRICAL POWER SUPPLY

Alternator 80 A, batteries 2x 175 Ah..

Optional

06460 Alternator 120 A	01257 Batteries 2x140Ah
08775 Alternator 150 A	06440 Batteries 2x230Ah

GVM AND GCM

Chassis weight related technical GVM max 20500 kg; Driveline related max GCM 44000 kg class 2.

Optional

00200 Driveline related max GCM 38000 kg class 2	00939 Driveline related max GCM 56000 kg class 2
---	---

APPLICATION CONDITIONS

Cyclonic air intake behind the cab.

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle, 2nd year driveline and 1st year breakdown.; ITS service.


Optional

08310 Service interval standard
--



Go to **DAF.com** to configure your own perfect DAF.

FT 4X2 Tractor, n-EC

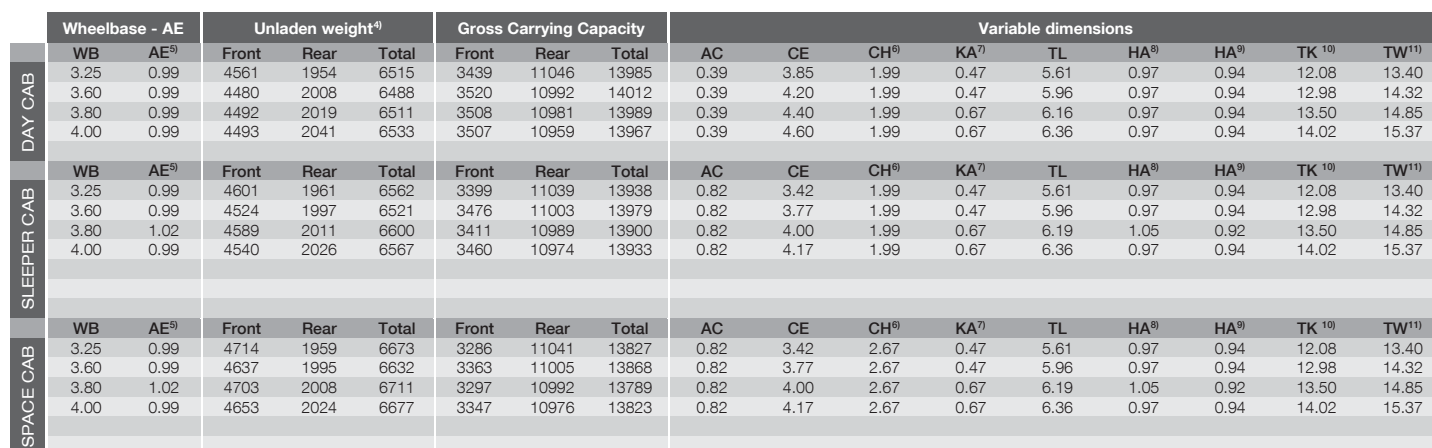

OTHER DIMENSIONS VA: 1.37 HV⁽¹²⁾: 0.97 HV⁽¹³⁾: 0.87 RB: 0.79 SB: 1.82 TB⁽¹⁴⁾: 2.48

- 8) Unladen height at centre of driven axle(s).
- 9) Laden height at centre of driven axle(s).
- 10) TK = turning circle between kerbs.
- 11) TW = turning circle between walls.
- 12) Unladen height at centre of front axle(s).
- 13) Laden height at centre of front axle(s).
- 14) TR is overall width at rear. (At centre of front axle 255)

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.